

# V5 ➤

ELECTRONIC SOFTSTARTER

# V2 ➤

ELECTRONIC SOFTSTARTER

*Easy to drive*



**POWER ELECTRONICS**®





# WHEN PROTECTION AND POWER ARE ESSENTIAL

With 25 years experience and more than 100.000 units working in the most demanding applications, Power Electronics continues to improve and extend the range of its recognised soft starters. The V2 and V5 series offer outstanding starting and stopping performance with maximum motor protection, by means of a powerful and precise current control. Experience the best after-sales service Power on Support that will guarantee the investment and your peace of mind.

V5 SOFT STARTER



2kW-150kW  
220V-1000V III  
IP20  
External or built-in bypass  
Delta or Star connection

V2 SOFT STARTER




2.2kW-37kW  
220V-400V III  
IP20-IP54  
IP54 built-in bypass



# POWER ELECTRONICS THE COMPANY

In Power Electronics we believe we are a SERVICE and MANUFACTURING company of power electronics. We help you along the whole product life cycle, from plant lay-out the after sales technical service, by providing close, flexible and customer oriented assistance that ensures we keep long-term relationships with our clients and partners of the INDUSTRIAL and SOLAR PHOTOVOLTAIC sectors.

Our HEAD OFFICE in Valencia (Spain) houses our high technology R&D centre as well as the electronics manufacturing. Additionally, two FACTORIES with a net area of more than 20.000 sqm with an available area of 80.000 sqm can produce annually 1GW of solar and 5GW of industrial equipment. All under the perspective of a vertical integration that enhances the production quality and flexibility.

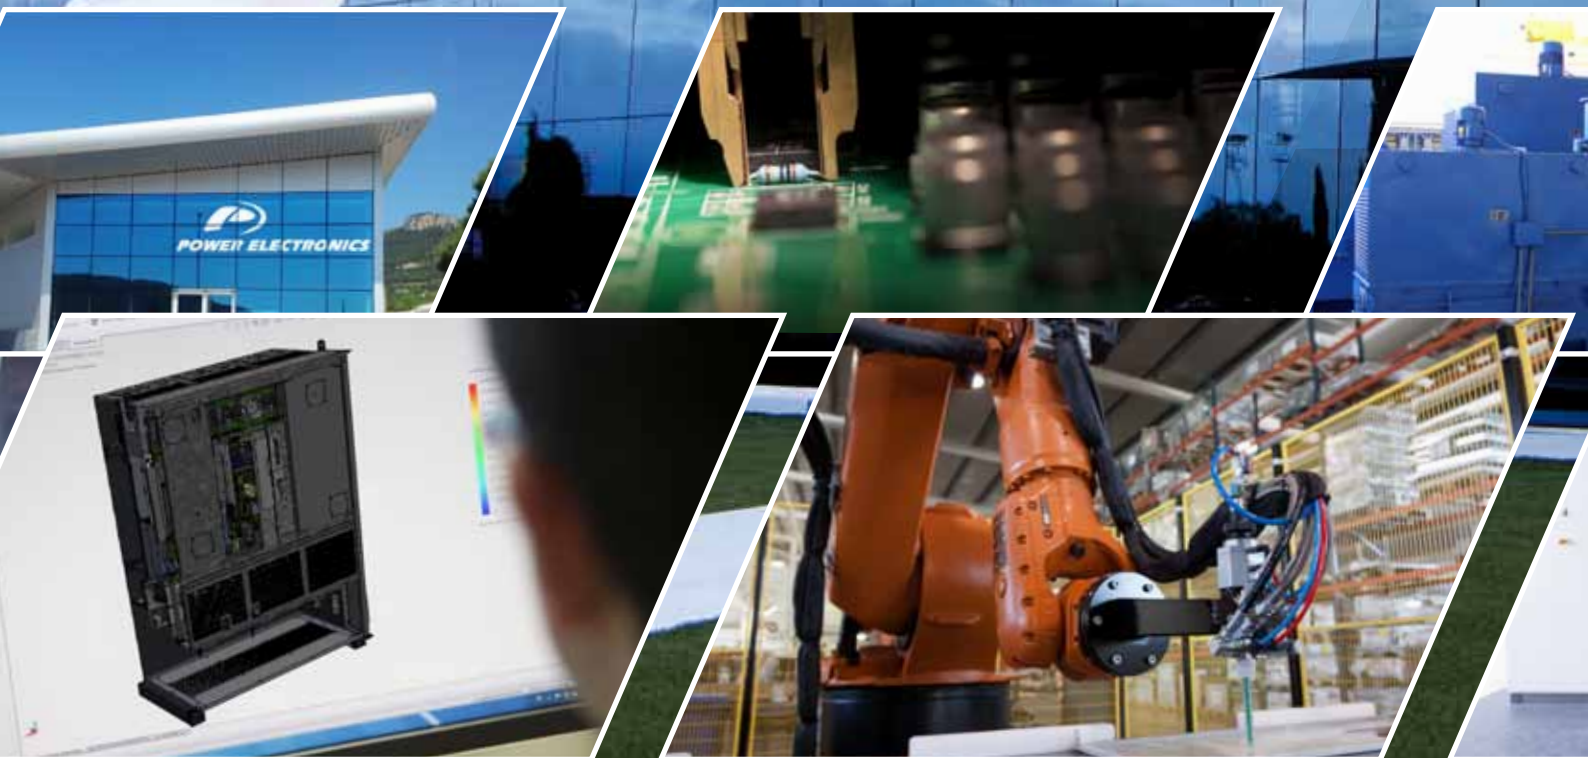

## INDUSTRIAL DIVISION - SOLAR DIVISION

VARIABLE SPEED DRIVES  
ELECTRONIC SOFT STARTERS

SOLAR INVERTERS  
SOLAR POWER STATIONS





## Our know-how at your disposal

Our expertise is divided into two main fields, the industrial one where we manufacture variable speed drives and soft starters, both in low and medium voltage, and the other is the solar business, where we manufacture solar inverters. The V5 and V2 series cover any possible requirement for the most demanding applications.

Since our birth back in 1987 we haven't stopped growing and competing against worldwide corporations, however our philosophy of giving service where others fail to do so, has brought us to where we are now. We continue to grow at great speed every year, and we hope that the near future will be of growth and expansion, consolidating more than 40 markets where we already are and adding some new horizons to our future.





# SAVING ENERGY FOR THINGS THAT MATTER

In Power Electronics we know that the modern world is getting faster and more complicated by the day and that often our priorities in life can get confused. When we design and create our products, we don't only think about numbers and graphics, we think about our clients, their companies and the surrounding environment, like we would think about our own.

And that is exactly why we understand that there are more things in life, not only work. We don't want our clients to worry about our products, we want to save their energy so that they can invest it in the things that really matter, their families, their friends, their hobbies...

We will take care of the rest: we will set up free technical seminars and courses so that our clients and their technicians can get to know the products as well as we do, we will assist with the commissioning with no additional cost because we believe in work well done, we will offer you a 24h phone line so that you can always ask what you want to know no matter the time of day or night, and we will never let our clients down if they have a problem... We will take care of all these things so that you can save your energy for things that really matter...


# Power on Support customer oriented strategy implemented by Power Electronics



POWER ON SUPPORT is a new concept which explains the customer oriented strategy implemented by Power Electronics since its origins more than 25 years ago. We do not simply consider ourselves an advanced power electronics manufacturer, but a services company in the market to take care of all our customers' needs and adapt to their requirements.

Therefore, flexibility and specialization play a key role. We are flexible to be able to supply advanced products delivered in very short lead times, service our product ranges in any market where we have a branch within 24 hours, commission our devices worldwide, offer a worldwide hotline 24/7...

We are ready to give technical advice and support about our products and the applications in which they are installed. Our clients also have at their disposal our engineering and consulting department, which comprises of a wide number of highly skilled and experienced engineers in the development of tailor-made solutions.




ENGINEERING AND CONSULTING  
24/7 HOTLINE  
24/7 ONSITE ASSISTANCE

FREE COMMISSIONING  
TRAINING  
3 YEARS WARRANTY



## Vertical integration for customers satisfaction

Vertical integration of the whole production process allows us to offer a fully flexibility, outstanding quality and immediate delivery time, thanks to complete production supervision and scheduling of the electronics, frames and cabins, assembly and testing.



RELIABLE ENGINEERING  
DESIGN FLEXIBILITY  
HIGH QUALITY COMPONENTS



VALUE CHAIN SUPERVISION  
FACTORY TESTED  
IMMEDIATE DELIVERY



# INDEX

<b>Page 10</b>	<b>V5 Soft starter</b>
Page 12	Discovering V5 series
Page 20	Applications
Page 22	Technical characteristics and Configuration table
Page 24	Standard ratings
Page 26	Power wiring Dimensions and Accessories
<b>Page 28</b>	<b>V2 Soft starter</b>
Page 30	Discovering V2 series
Page 32	Technical characteristics and Power wiring
Page 33	Standard ratings, Dimensions and Control
<b>Page 34</b>	<b>Warranty</b>
<b>Page 35</b>	<b>Contact</b>





# ELECTRONIC SOFT STARTER V5



- Voltage range from 230V-1000V and power from 2kW to 1500kW
- Built-in motor protections
- Conformal coated electronics and an operating temperature of up to 50°C
- Highest break away torque
- 3 wires or 6 wires (delta) connection
- Built-in or external Bypass
- 3 year warranty and 24h service and replacement commitment

The V5 Series soft starters are Power Electronic's fifth generation, ranging from 2kW to 1500kW. An electronic starter with the most advanced control systems and voltage during motor starting and stopping, ensuring the best performance for any industrial application.

Motors are the driving force of the industry and to protect them, the V5 series integrate protections that allow a thorough diagnosis of your motor and its application. The V5 series are engineered and manufactured under the most demanding quality controls, offering a rugged mechanical design and top class hardware and software performance to those applications that run under harsh environments.

## QUALITY AND RELIABILITY FOR THE MOST DEMANDING APPLICATIONS



## EASY FRONT ACCESS AND INSTALLATION

Its metallic cabinet enclosure simplifies the installation and enables easy access to the control and power terminals, electronic boards, bypass contactors and cooling fans. With its vertical cooling system the user can install multiple units in the same cabinet.

## DYNAMIC TORQUE CONTROL

The V5 Series integrates a "Dynamic Torque Control", an exclusive starting mode from Power Electronics, that optimises starting and stopping sequences, smoothing the current peaks and the mechanical requirements of the applications.



## CONTROL FLEXIBILITY

Programming by the local display unit or PC (PowerCOMMS Program). Two analogue and five digital inputs, three relays and one analogue output provide the V5 with many possibilities of control.

RS232/RS485 serial communications and Modbus are built-in.

Profibus and DeviceNet protocols are available.

## RELIABILITY

25 years of evolution and field testing have gone into the V5 Softstarter, and in conjunction with our technical service assistance, we guarantee the maximum availability of these units, in the harshest conditions.

Overload, underload, phase sequence, sequence imbalance, rotor locked, shearpin current, phase imbalance, are some of the motor protections functions embedded in the V5 as standard.



## EXTERNAL OR BUILT-IN BYPASS

The V5 softstarter offers both possibilities. The user can select the standard model that offers the possibility to install an external contactor to bridge the power stage once the acceleration ramp is finished, and re-engages for the deceleration ramp.

Otherwise the user can choose the V5 model with built in bypass which offers the same functionality without requiring any external installation.

## 3 WIRES AND 6 WIRES (DELTA) CONNECTION

The 5<sup>th</sup> generation of the V5 series enables 3 wires or 6 wires (delta) connection that can down-size the unit to 30% in certain applications.

## BUILT-IN MONITORING

$V_{RS}$ ,  $V_{ST}$ ,  $V_{TR}$ ,  $I_R$ ,  $I_S$ ,  $I_T$ , Cos phi, Power (kW), Frequency (Hz), Energy kW/h. Maximum motor care and protection of the application.

## STRONG AND EASY TO OPERATE

Unique control board. Conformally coated electronics.

## PERMANENT INFORMATION

The V5 series display constantly motor status and complete information of the installation where it is integrated. The user has access locally (keypad unit) or remote (serial communications) to the following information:

- Voltage in each phase
- Number of starts
- Total and Partial
- Power (kW) and current (A) in each phase
- Analogue input/output status
- Motor phi cosine (Power Factor), digital input/output status
- Motor shaft torque,
- Timer total and partial
- Fault history (5 most recent fault).








### INDICATING LEADS

- ON** Indicate power in the control board.
- RUN** Flashing: Accelerating/Decelerating.  
Lighting: The motor is running at nominal speed.
- FAULT** The V5 has tripped on fault protection.

### LCD DISPLAY

- STATUS LINE** - Top.
- CONTROL LINE** - Bottom.

### CONTROL KEYPAD

-  To unfold the screen groups.
-  To scroll between screen groups.
-  To scroll between screen groups.
-  Motor start.
-  Motor Stop/Reset.



ELECTRONIC SOFTSTARTER




# Multiple features

A high investment in the development of control software has led to the most accurate, powerful and flexible performance.




The V5 soft starter gets the most from your facilities, by implementing the unique dynamic torque control algorithm (CDP) that offers an ultimate break away torque and starts the most demanding applications. Some of the starting and stopping extended settings are:

## STARTING MODES

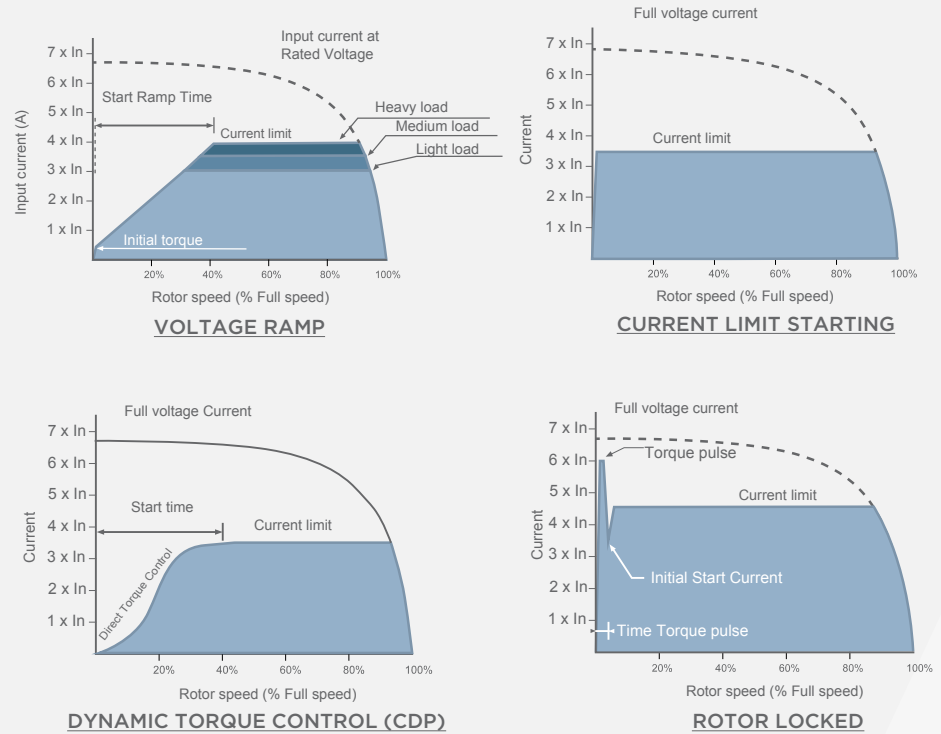

## STOP MODES

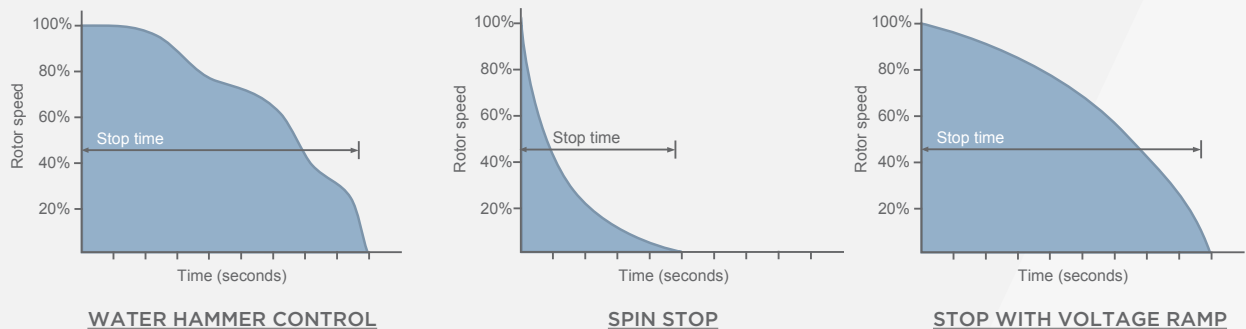


## THE DUAL SETTING FUNCTION

The V5 soft starter offers a double independent setting of the start and stop parameters, which permits the soft starter to shift performance according to the conditions: loaded or unloaded, raw material conditions, static pressure, temperature variations, blocked shaft, etc... the V5 control allows advanced users to adjust: torque pulse duration, break away torque and time, current limit, stop time, level and time of the overload and underload protections, i2t overload curve, number of start per hour, minimum speed and water hammer control algorithm.

GET THE MOST OF YOUR  
APPLICATION WITH THE DUAL  
SETTING FUNCTION





**SLOW SPEED.** The V5 Series allow adjusting torque to slow speed driving backward or forward (JOG FUNCTION). This slow speed will be active during the time assigned before acceleration ramp or after stop deceleration. Load and download of centrifuges or mixing, machine positioning or unblocking pumps are some of the applications of JOG Function.

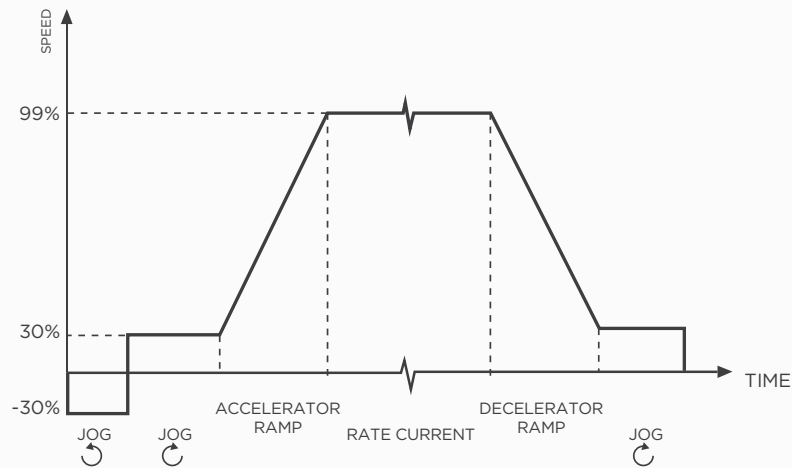

**DC BRAKE.** In some applications, specially in high load inertia machines, DC injection with a precise torque is possible with V5 soft starter during the time needed for each application.

**FULL PROTECTIONS**


- Input phase sequency
- High input voltage
- Low input voltage
- Start current limit
- Overlock rotor
- Motor overload
- Motor underload
- Motor overtemperature PTC
- Shearpin Current
- Unbalanced phases
- Phase Sequence
- Maximum number of starts per hour
- Thyristor fault
- Equipment temperature

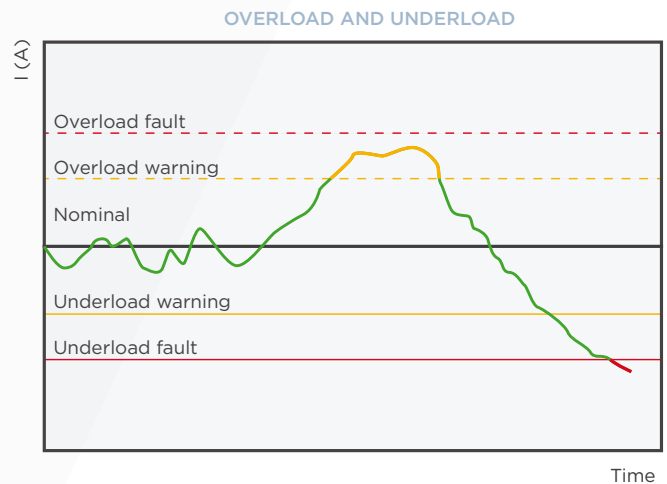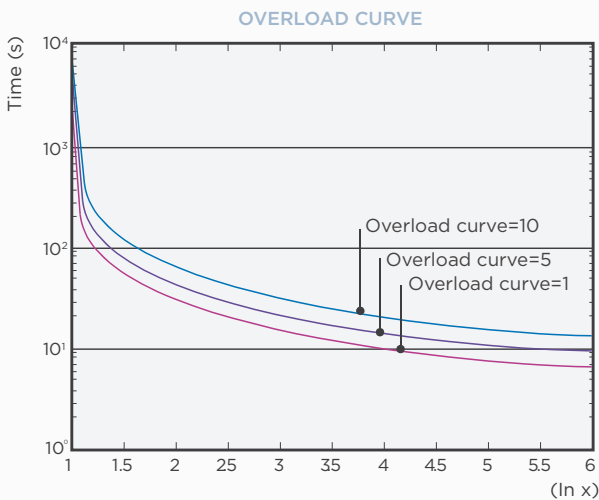


**BUILT-IN AND EXTERNAL BYPASS.** The bypass is activated after reaching the nominal speed and provides a yield of 100% because switching losses and heat dissipation in thyristors are removed from the circuit maximising savings. All protections and functionalities continue to be active with the starter in bypass.

The V5 soft starters are equipped with additional terminals for the easy connection of an external bypass contactor. If you prefer, you can select the integrated bypass, simplifying the external hardware with consequent savings in installation time and wiring.


### EXTERNAL BYPASS

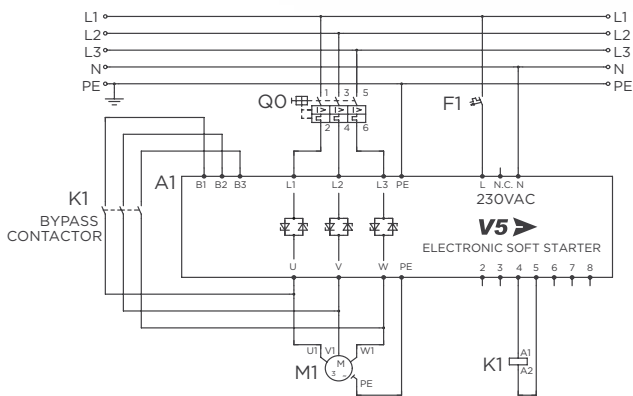

### BUILT-IN BYPASS

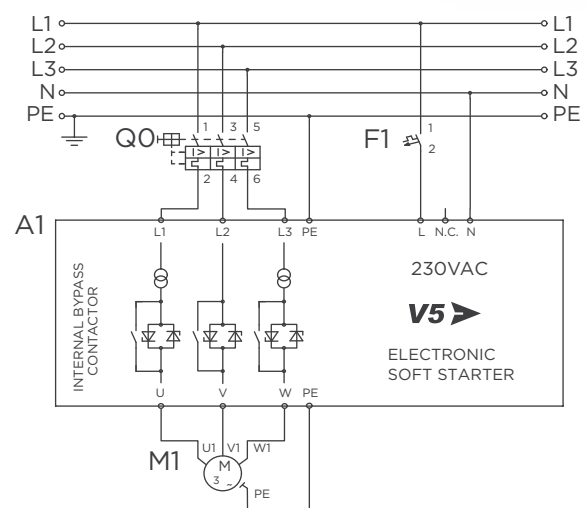

### 6 WIRES - BUILT-IN BYPASS

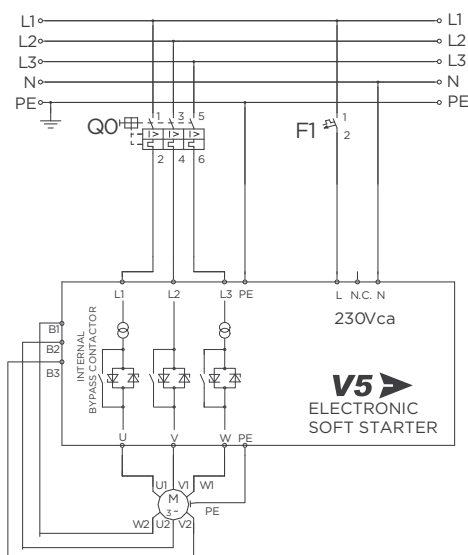

ALL PROTECTIONS  
AND FUNCTIONALITIES  
CONTINUE TO BE ACTIVE  
WITH THE DRIVEN  
BYPASS, BUILT-IN OR  
EXTERNAL



**CONFORMAL COATING.** The PCB coating protects the micro lead components that are vulnerable to dust, moisture, pollution (PD3) and corrosive gasses 3C3 build up. Which can produce conductive paths that can result in pins short circuiting. Power Electronics designs are dedicated to harsh environments thus PCBs cards are fully coated with the latest high military and aerospace technology (IEC61086-1:2004,-3-1).

**EMC METAL CABINET.** Design metal enclosure improves EMC, obtaining maximum immunity and minimum emissions.

**THYRISTORS OVERSIZED UP TO 450%.** Allows its installation in applications with high starting torque and overload.



HIGH MILITARY AND  
AEROSPACE TECHNOLOGY  
CONFORMAL COATING ON  
ALL ELECTRONIC BOARDS  
(IEC61086-1:2004,-3-1)

**COMMUNICATIONS.** Modbus-RTU over serial communication (RS232/RS485) built-in as standard, optionally communications gateways are available: Ethernet TCP/IP, Profibus-DP, N2 Metasys and DeviceNet.

**PROFIPOWER.** Modbus RTU (RS485) to Profibus-DP (9-pinD-SUB/F). Communication speed max 12MB, Profibus cable recommended.

**POWERNET.** Communications gateway is available: Modbus TCP, Devicenet and CANopen.

*DEVICENET.* DeviceNet (CAN) to Modbus RTU (RS485). 31 max. nodes. Asynchronous communication control mode. Half Duplex Communication System, Transmission Type: Bus method, Multi drop link system. Communications speeds: 125kbps, 250kbps, 500kbps, 1000kbps. Transmission distance max. 500m. (125kbps Devicenet cable).

*ETHERNET.* Modbus TCP (Ethernet) to Modbus RTU (RS485). Communication System: Half Duplex, Full Duplex. CSMA/CD communication method. Communication speed: 10Mbps, 100Mbps.

*CANOPEN.* CANOpen (CAN) to Modbus RTU (RS485) communication speed 50kbps, 250kbps, 500kbps, 1Mbps. 31 max. nodes. Transmission distance max. 500m. available with SDO y PDO.







**ELECTRONIC SOFTSTARTER**



**PUMPING**



**VENTILATION**

# PUMPING AND VENTILATION

In pumping systems, the V5 also offers functions such as water hammer surge control stop, to gradually reduce the flow and avoid mechanical stress on valves and pipes. Besides, there are an underload function which determines when the pump is working without water, or overload function which is activated when possible clogging has occurred. There are also some protections available in the special menu for pumping control. The JOG function enables slow speed in the forward or reverse direction for a possible unblock.

In fan applications, the soft starter is used to limit input current and to reduce mechanical and electrical stress preventing slipping belts. If a fan is rotating in the wrong direction when starting, the V5 slows down the speed until it stops and then it starts in the right direction avoiding surges and mechanical tension. The direction of the starting is always under control.

The V5 starter has been designed to operate under the harshest environments with fully coated electronics and high operating temperature.

Its design is optimal for waste water treatment plant (WWTP), drinking water treatment stations, desalination plants, watering stations, tunnels and mines extractions, etc.







MOTION



MILLING

# MILLS, CRUSHERS AND CONVEYORS

When controlling conveyor belts, crushers and conveyors, any overload or underload situation that could cause inefficiency or damage, is detected immediately by the V5 to avoid potential problems.

In addition, in crushers or mills, the torque pulse provides an additional overload that allows starting even if the load torque is high. Once this function completes, the starting continues according to the selected starting method. The PTC signal prevents the motor from overheating in applications with a high duty cycle.

The slow speed or JOG function, in forward or reverse can be useful for aligning a load or to allow a slow speed for performing maintenance tasks or testing.

Overall, our equipment is ready when needed, when a high starting torque is required without mechanical shock, smooth acceleration without overload, even when the machines is being charged with a very high torque, providing minimal mechanical stress.



<b>INPUT</b>	Input voltage	(3 phase) 230-500V (-20% to +10%) (3 phase) 690V (-20% to +10%) (3 phase) 1000V (-20% to +10%)
	Current range	9A to 1500A
	Supply frequency	47 to 62 Hz
	Control voltage	230V ±10%, others under demand
<b>OUTPUT</b>	Connection	3 wires / 6 wires (Delta) <sup>[1]</sup>
	Output voltage	0 to 100% Supply voltage
	Output frequency	Same as the input
	Efficiency (at full load)	>99%
<b>ENVIRONMENTAL CONDITIONS</b>	Ambient temperature	Minimum: 0°C / Maximum: +50°C
	Storage temperature	-10°C to +70°C
	Ambient humidity	< 95%, non-condensing
	Altitude losses	>1000m, 1% each 100m; 3000m max
	Protection degree	IP20
	Degree of pollution	Degree of pollution 3
<b>MOTOR PROTECTIONS</b>	Input phase missing	
	Low input voltage	
	High input current	
	Starting current limit	
	Rotor locked	
	Underload	
	Motor overtemperature (PTC, normal status 150R-2K7)	
	Number of start / hour	
	Motor overload (thermal mode)	
	Phase unbalance	
Shearpin current		
<b>SOFT STARTER PROTECTIONS</b>	Thyristor fault	V5 over temperature
<b>ADJUSTMENTS</b>	Torque pulse	
	Initial torque	
	Initial torque time	
	Current limit: 1 to 5 I <sub>n</sub>	
	Acceleration time	
	Deceleration time / Freewheel stop	
	Slow speed (1/7 fundamental frequency)	
	Number of starts/hour allowed	
	Water hammer surge control stop	
	Overload: 0.8 to 1.2 I <sub>n</sub> , Overload slope: 0 to 10	
	DC braking	
	Dual setting	
	Torque control	
For additional information consult the technical manual		
<b>INPUT AND OUTPUT SIGNALS</b>	2 analogue inputs, 0-20mA or 4-20mA, 0-10V	5 configurable digital inputs
	1 PTC input	3 changeover output relays (10A 250Vac non inductive)
	1 analogue output 0-20 mA or 4-20mA	
<b>COMMUNICATIONS</b>	Physical level RS232/RS485	
	Modbus RTU Protocol	
	Optional Protocol: Profibus-DP, DeviceNet, CANOpen, Modbus TCP-IP	
<b>CONTROL</b>	Local via keypad	
	Communications (Modbus RTU, RS232/RS485)	
	Remote via digital input	
<b>LED'S INDICATIONS</b>	LED1 Green, voltage present on control board	
	LED2 Orange, Blinking: Motor accelerating / decelerating - On: Motor running	
	LED3 Red, fault present	
<b>REGULATIONS</b>	CE, UL, cUL, cTick.	

NOTE [1] Consult availability with Power Electronics.

## CONFIGURATION TABLE

V5	O275		.6		B		W	
V5 series	Output current <sup>[1]</sup>		Input voltage		Internal bypass		Connection	
V5	0009	9A	-	230-500V	-	Without internal bypass	-	3 wires
	0017	17A	.8	550V	B	With internal bypass	W	6 wires (Delta) <sup>[2],[3]</sup>
	...	...	.6	690V				
	1500	1500A	.10	1000V <sup>[2]</sup>				

NOTES [1] Check the rated current of the motor nameplate to ensure compatibility with the chosen softstarter.

[2] Consult availability and standard rating with Power Electronics.

[3] Only with internal bypass.

## CLASSIFICATION OF STARTERS

- A) In the table below select the starting current depending on the application.  
 B) Once the motor voltage (note whether or not with internal bypass) select the column for this current rate, 3xIn , 4xIn or 4.5xIn.  
 C) Select the correct model considering power and rated current of the motor plate.

EXAMPLE • **Refiners Pumps, 400VAC, 83A, 45kW motor.** Characteristics starting of Refining Pump if 10 startings per hour, 50 % duty cycle, 50°C and altitude ≤ 1000m: 4.0xIn.

Look at 400VAC table, equipment with bypass, select the column to select 4xIn power 45kW. The starter V50075B with a rated current of 85A is suitable for this application.

## STARTING CURRENTS

COMMON APPLICATIONS	CHARACTERISTIC STARTING CURRENT
<b>GENERAL</b>	
Hydraulic Equipment	3.5 x In
Agitators	4.0 x In
Compressors (Screw compressor, without load)	3.0 x In
Compressors (Reciprocating compressors, without load)	4.0 x In
Conveyors	4.0 x In
Mixers	4.5 x In
<b>WATER AND WASTE WATER</b>	
Centrifugal Pumps	3.0 x In
Mono and High Pressure Pumps	4.0 x In
Multistage Pumps	4.0 x In
Vertical Pumps	3.0 x In
Split Chamber Pumps	3.5 x In
Submersible Pumps	3.5 x In
<b>VENTILATION</b>	
Fans (extraction)	3.5 x In
Fans (fresh air)	4.5 x In
Condensor Fans	3.5 x In
Climatization Turbine	4.5 x In
<b>PULP AND PAPER INDUSTRY</b>	
Refiner Pumps	4.0 x In
Pulp Pumps	4.0 x In
Vacuum Pumps	4.0 x In
Pulp Machines	4.5 x In
Trommels	4.0 x In
Pulp Mixers	4.0 x In
Filters	4.0 x In
<b>METALS, AGGREGATES AND MINERALS</b>	
Dust Filters Fans	3.5 x In
Conveyor Belts	4.5 x In
Crushers	3.0 x In
Hammer Mills	4.5 x In
Jaw Crushers	4.0 x In
Rotor Bar Mills	4.5 x In
Ball Mills	4.5 x In
Secondary Mills and Sand Pulverizers	3.5 x In
Eccentric Feeder	4.5 x In
Trommels	4.0 x In
Vibrators	4.0 x In
Separators	4.0 x In
Feeders	3.5 x In

COMMON APPLICATIONS	CHARACTERISTIC STARTING CURRENT
<b>FOOD INDUSTRY</b>	
Air Compressors	4.0 x In
Sorters	3.5 x In
Bottle Wash Machines	3.0 x In
Driers	4.5 x In
Centrifuges	4.0 x In
Crushers, punchers	4.5 x In
Palletizers	4.5 x In
Separators	4.5 x In
Cutters	3.0 x In
Material Handling	3.5 x In
<b>TOOLING MACHINES</b>	
Arm Saws	4.5 x In
Buzz Saws	3.5 x In
Stamping Presses	4.5 x In
Crumbing Machines	3.5 x In
Chamfering Tools	3.5 x In
Flatters	3.5 x In
Sanding Machines	4.0 x In
Lathes	4.5 x In
Crusher Machines	3.5 x In
Palletizers	4.5 x In
Presses	4.0 x In
Turn Tables	4.0 x In
Transporters	4.0 x In
<b>PETROCHEMICAL</b>	
Centrifugal Machines	4.0 x In
Screw Pumps	4.0 x In
Gas Pumps (propane, butane, ...)	3.0 x In
Crude Oil Extraction Pumps	4.5 x In
Crude Oil Transfer Pumps	4.5 x In
Hydrocarbon Transfer Pumps (liquid stage)	3.5 x In
Transport and Packaging	3.5 x In
Conveyors	3.5 x In



## STANDARD V5 SOFT STARTER

230V to 500V (-20% to +10%)						
FRAME	CODE	Rated I(A)	Power motor until (kW)			
			230V	400V	440V	500V
1	V50009	9	2	4	5	5.5
	V50017	17	5	7	9	11
	V50030	30	9	15	18.5	18
	V50045	45	14	22	25	30
	V50060	60	18	30	35	40
	V50075	75	22	37	45	50
	V50090	90	25	45	55	65
2	V50110	110	35	55	65	80
	V50145	145	45	75	90	100
	V50170	170	50	90	110	115
	V50210	210	65	110	120	150
	V50250	250	75	132	160	180
3	V50275	275	85	150	170	200
	V50330	330	100	185	200	220
	V50370	370	115	200	220	257
	V50460	460	145	250	270	315
4	V50580	580	185	315	375	415
	V50650	650	200	355	425	460
	V50800	800	250	450	500	560
	V50900	900	280	500	560	630
	V51000	1000	322	560	616	700
5	V51200	1250	400	710	800	900
	V51500	1500	500	800	900	1100

690V (-20% a +10%)			
FRAME	CODE	Rated I(A)	Power motor until (kW)
			690V
1	V50009.6	9	7.5
	V50017.6	17	15
	V50030.6	30	30
	V50045.6	45	45
	V50060.6	60	60
	V50075.6	75	75
	V50090.6	90	90
2	V50110.6	110	110
	V50145.6	145	140
	V50170.6	170	160
	V50210.6	210	200
	V50250.6	250	230
3	V50275.6	275	250
	V50330.6	330	315
	V50370.6	370	355
	V50460.6	460	450
4	V50580.6	580	560
	V50650.6	650	630
	V50800.6	800	800
	V50900.6	900	900
	V51000.6	1000	960
5	V51200.6	1250	1250
	V51500.6	1500	1500

NOTES

- The values of the tables are valid for 4-pole AC motors.
- For current values which are not in accordance with the values in these tables, please contact Power Electronics.
- For higher power ratings, contact to Power Electronics customer support.
- Classification of soft starters according to UNE-EN60947-4-2. 10 starts per hour, 50% duty cycle, 50°C and altitude<1000m.

## V5 SOFTSTARTER WITH BUILT IN BYPASS

400Vac (-20% a +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 400Vac	Max. Rated I(A)	Motor power (kW) at 400Vac	Max. Rated I(A)	Motor power (kW) at 400Vac
1	V50009B	14	7.5	10	5.5	9	4
	V50017B	26	15	19	11	17	7.5
	V50030B	45	22	34	18.5	30	15
	V50045B	68	37	51	30	45	22
	V50060B	90	45	68	37	60	30
	V50075B	113	55	85	45	75	37
	V50090B	135	75	101	55	90	45
2	V50110B	165	90	140	75	110	55
	V50145B	218	110	164	90	145	75
	V50170B	255	150	192	110	170	90
	V50210B	315	185	237	132	210	110
	V50250B	375	200	281	150	250	132
3	V50275B	412	220	310	185	275	150
	V50330B	495	280	370	200	330	185
	V50370B	555	315	416	220	370	200
	V50460B	690	400	518	280	460	250
4	V50580B	870	450	650	355	580	315
	V50650B	975	500	731	400	650	355
	V50800B	1200	630	900	500	800	450

500Vac (-20% a +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 500Vac	Max. Rated I(A)	Motor power (kW) at 500Vac	Max. Rated I(A)	Motor power (kW) at 500Vac
1	V50009B	14	11	10	7.5	9	5.5
	V50017B	26	18.5	19	15	17	11
	V50030B	45	30	34	22	30	18.5
	V50045B	68	45	51	37	45	30
	V50060B	90	55	68	45	60	37
	V50075B	113	75	85	55	75	45
	V50090B	135	90	101	75	90	55
	2	V50110B	165	110	140	90	110
V50145B		218	150	164	110	145	90
V50170B		255	185	192	132	170	110
V50210B		315	220	237	185	210	150
V50250B		375	250	281	200	250	185
3	V50275B	412	280	310	220	275	200
	V50330B	495	355	370	250	330	220
	V50370B	555	400	416	280	370	250
	V50460B	690	500	518	355	460	315
4	V50580B	870	560	650	450	580	400
	V50650B	975	630	731	500	650	450
	V50800B	1200	710	900	630	800	560

690Vac (-20% a +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 690Vac	Max. Rated I(A)	Motor power (kW) at 690Vac	Max. Rated I(A)	Motor power (kW) at 690Vac
1	V50009.6B	14	15	10	11	9	7.5
	V50017.6B	26	22	19	18.5	17	15
	V50030.6B	45	45	34	37	30	30
	V50045.6B	68	75	51	55	45	45
	V50060.6B	90	90	68	75	60	55
	V50075.6B	113	110	85	90	75	75
	V50090.6B	135	132	101	110	90	90
	2	V50110.6B	165	150	140	132	110
V50145.6B		218	200	164	150	145	132
V50170.6B		255	250	192	200	170	150
V50210.6B		315	315	237	220	210	200
V50250.6B		375	355	281	250	250	220
3	V50275.6B	412	400	310	315	275	250
	V50330.6B	495	450	370	355	330	315
	V50370.6B	555	500	416	400	370	355
	V50460.6B	690	630	518	500	460	450
4	V50580.6B	870	800	650	630	580	560
	V50650.6B	975	900	731	710	650	630
	V50800.6B	1200	1000	900	900	800	800

NOTES - Rated power and current at 400Vac, 500Vac and 690Vac (-20% to +10%) for motors at 1500rpm.  
 - The values of the tables are valid for 4-pole AC motors.  
 - For current values which are not in accordance with the values in these tables, please contact Power Electronics.  
 - For higher power ratings, contact to Power Electronics customer support.  
 - Classification of soft starters according to UNE-EN60947-4-2. 10 starts per hour, 50% duty cycle, 50°C and altitude<1000m.

## POWER WIRING


### CONFIGURATION CONTROL AND POWER WIRING

The V5 series include multiple control possibilities, not only due to a large number of inputs and outputs, but also for the versatility of the configuration of all of them.


### INPUT AND OUTPUT

Five digital multifunctions inputs, 2 analogue inputs and one digital input available and the 6<sup>th</sup> digital input is dedicated for the PTC input, 3 relay outputs and 1 analogue available.


CONFIGURATION OF POWER WIRING FOR SOFTSTARTER WITH STANDARD BYPASS

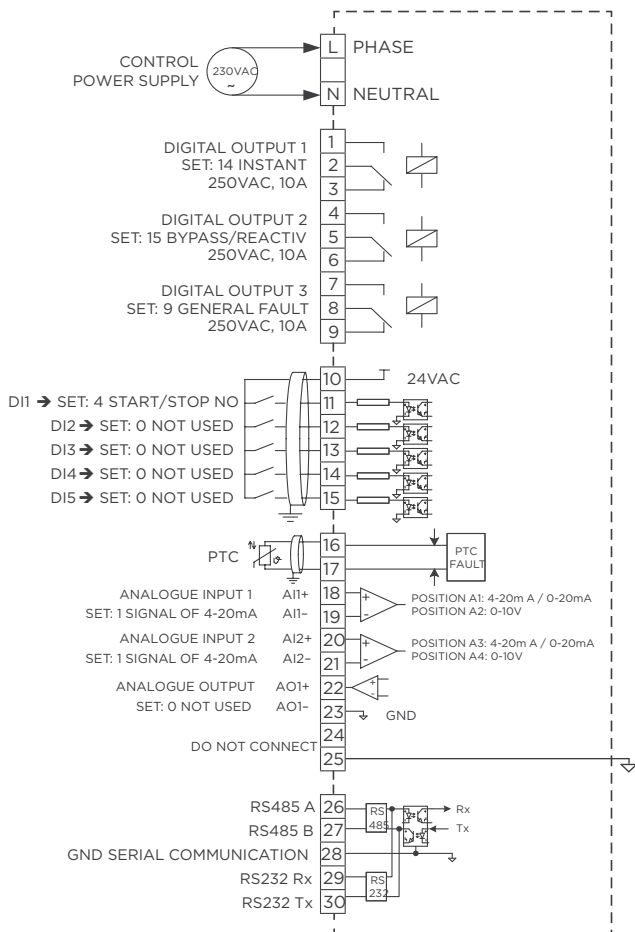


CONFIGURATION OF POWER WIRING FOR SOFTSTARTER WITH INTERNAL BYPASS

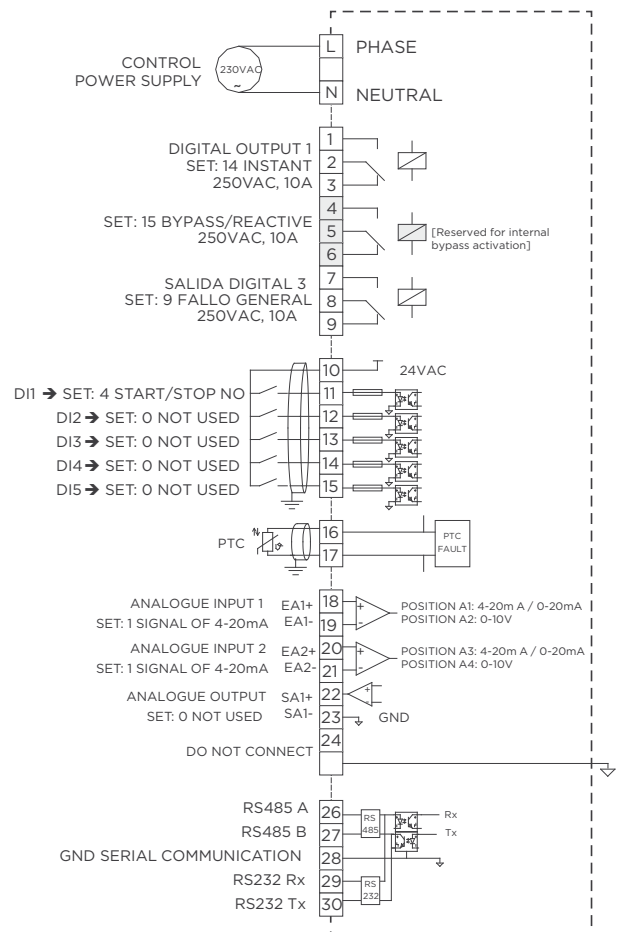


## DIMENSIONS




FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
1	10	12




FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
2	20	22



FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
3	50	57



FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
4	80	90



FRAME	WEIGHT (kg) Standard V5
5	310

## ACCESSORIES

CODE	ACCESSORIES DESCRIPTION
I001	Profipower Communication module
I004	PowerNET Communication module
P0015 <sup>[1][2]</sup>	Bypass Kit V50060-V50090
P054-005A <sup>[1][2]</sup>	Bypass Kit V50110-V50250
L051 <sup>[1]</sup>	Bypass terminal 9-17A
L057 <sup>[1]</sup>	Bypass terminal 30-45A

CODE	ACCESSORIES DESCRIPTION
V01	Display kit 2m extender with casing
V02	Display kit 1m extender with casing
V09	Display kit 3m extender with casing
V16	Display kit 5m extender with casing
MFV50275	DC braking module 275A

NOTES [1] Accessories for external bypass in standard V5 soft starter.  
[2] Each equipment needs three units.



# ELECTRONIC SOFT STARTER V2



- Voltage range from 230V - 400V and power from 2.2kW - 37kW
- Multiple built-in motor protections
- Wide temperature range from 0° to +50°C (IP54)/40°C (IP00)
- Available with internal bypass
- Maximum starting torque in motor
- Easy adjustment of parameters using potentiometers
- 3 year warranty and 24h service and replacement commitment

For over two decades, the V2 series is part of the family of Power Electronics' soft starters. It is a compact and efficient solution. It is equipped with an advanced control technology and motor protection. With coated electronics, the V2 is resistant in harsh environments. It has also been designed in two versions, IP00 and IP54 incorporating an integrated bypass that reduces wiring installation.

Features as underload and overload, two stopping options, by inertia or deceleration ramp and its compact size and multiple protections make this soft starter the optimum solution for many applications.

## ROBUST, EASY AND COMPATIBLE WITH MULTIPLE APPLICATIONS



## WIDE POWER RANGE

Power from 2.2kW to 37kW, 220-400V. Giving your installation features that guarantee a safe operation.

## EASY INSTALLATION

Its compact size makes possible the installation of multiple softstarters in the same cabinet.



## COATED BOARDS

V2 boards are coated to withstand the harshest environments.

AVAILABLE WITH  
INTEGRATED BYPASS.  
MOTOR PROTECTIONS  
STILL ACTIVE


## DEGREE OF PROTECTION IP54 AND IP00

The V2 soft starters are available with IP00 protection for temperatures of 40°C (with external bypass) and IP54 for temperatures of 50°C (with built-in bypass).

## EASY SET UP OF PARAMETERS

A series of potentiometers allow a precise adjustment of parameters and protections.

LED status indicators allow an easy configuration and monitoring.

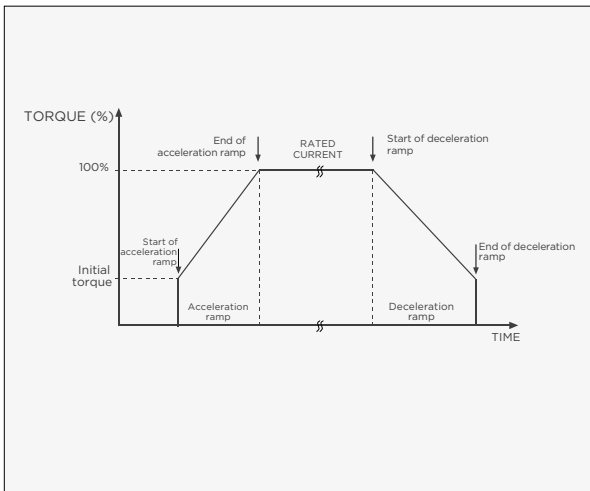


### EASY PROGRAMMING.

The potentiometers adjust parameters such as current limit, overload, underload, initial torque, acceleration and deceleration ramps and overload curve.

- LED1 READY
- LED2 RUN
- LED3 OL WARNING/ UL FAULT
- LED4 OVERLOAD
- LED5 OVERTEMPERATURE
- LED6 GENERAL FAULT

### NORMAL START POTENTIOMETERS CONFIGURATION




### APPLICATIONS

Use the V2 soft starter with protections for overload, underload and for locked rotor, protecting your pumping equipment the best way possible. Furthermore, this soft starter has torque control or deceleration ramp features that will prevent water hammer.

Overall, the V2 with its soft start reduces mechanical stress to a minimum and extends the life of your facility.

The IP54 protection and coated boards is suitable for more aggressive environments.

Finally, pumps, fans, conveyors, compressors, agitators, mixers, elevators, cranes, forklifts ... are some examples of applications that can benefit from the use of this equipment.


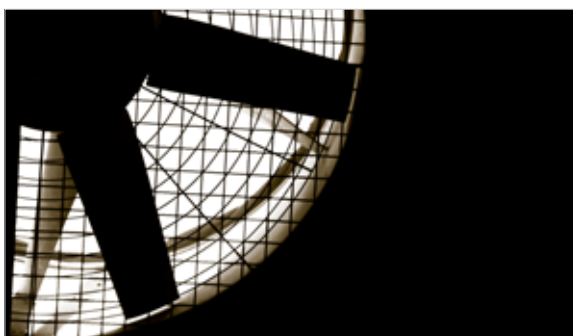




<b>INPUT</b>	Input voltage	(3 phase) 230-400V (±10%)
	Current range	9A to 75A
	Frequency	47 to 62 Hz
	Control voltage	230V ±10%, others under demand
<b>OUTPUT</b>	Output voltage	0 to 100% of input voltage
	Output frequency	47 - 62 Hz
	Efficiency (at full load)	>99%
<b>ENVIRONMENTAL CONDITIONS</b>	Ambient temperature	Operation: 0°C to +40°C. for IP00 Operation: 0°C to +50°C. for IP54
	Storage temperature	0°C to +70°C
	Humidity	95% at 40°C non condensing
	Altitude de-rating	>1000m, 1% each 100m; maximum 3000m
	Protection degree	IP00; IP54
	Cooling	Natural
<b>MOTOR PROTECTIONS</b>	Input phase loss	Starting current limit
	Rotor locked	Motor overload (thermal model)
	Underload	Phases imbalance
<b>SOFT STARTER PROTECTIONS</b>	General fault	V2 over temperature
<b>ADJUSTMENTS</b>	Initial torque 30 to 99%	Acceleration ramp 0 to 15 sec.
	Deceleration ramp 0 to 45 sec.	Overload 0.8 to 1.2 In
	Overload curve 1 to 10	Underload 0.2 to 0.6 In
	Underload curve 1 to 10	Current limit 1 to 5 In
<b>AUXILIARY CONTACTS</b>	2 change over relays 5A, 230Vac	Fault relay
	Instantaneous relay	
<b>LED'S INDICATIONS</b>	LED 1 Ready	
	LED 2 Start	
	LED 3 Overload warning / Underload fault	
	LED 4 Overload	
	LED 5 Overtemperature	
	LED 6 General fault	
<b>REGULATIONS</b>	CE, UL <sup>[1]</sup> , cUL <sup>[1]</sup> , cTick	

NOTE [1] On process.

### POWER WIRING CONFIGURATION

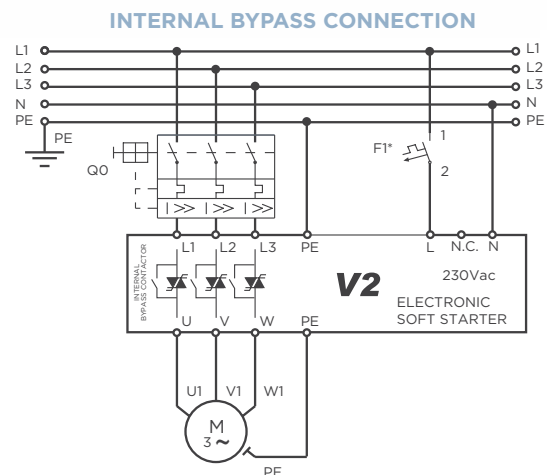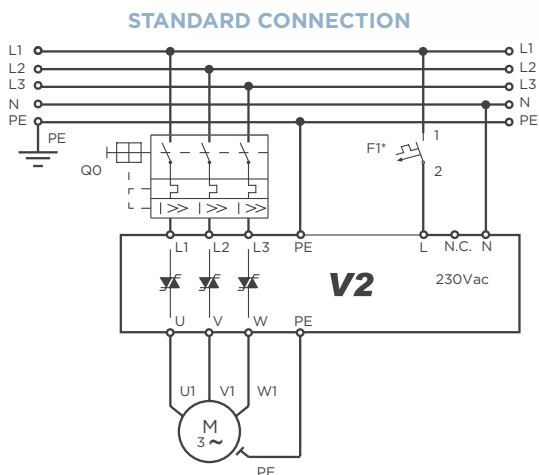

# Standard ratings


## Dimensions and Control

### STANDARD RATINGS


FRAME	CODE	Rated I(A)	POWER MOTOR (kW) at 230V	POWER MOTOR (kW) at 400V	PROTECTION DEGREE
1	V2009	9	2.2	4	IP00
	V2017	17	4	7.5	IP00
	V2030	30	9	15	IP00
	V2045	45	15	22	IP00
	V2060 <sup>[1]</sup>	60	18.5	30	IP00
	V2075 <sup>[1]</sup>	75	22	37	IP00
	V2009B	9	2.2	4	IP54
	V2017B	17	4	7.5	IP54
	V2030B	30	9	15	IP54
2	V2045B	45	15	22	IP54
	V2060B	60	18.5	30	IP54
	V2075B	75	22	37	IP54

NOTE [1] Includes an integrated Bypass function. The motor protection is operating all the time.

### DIMENSIONS AND WEIGHTS

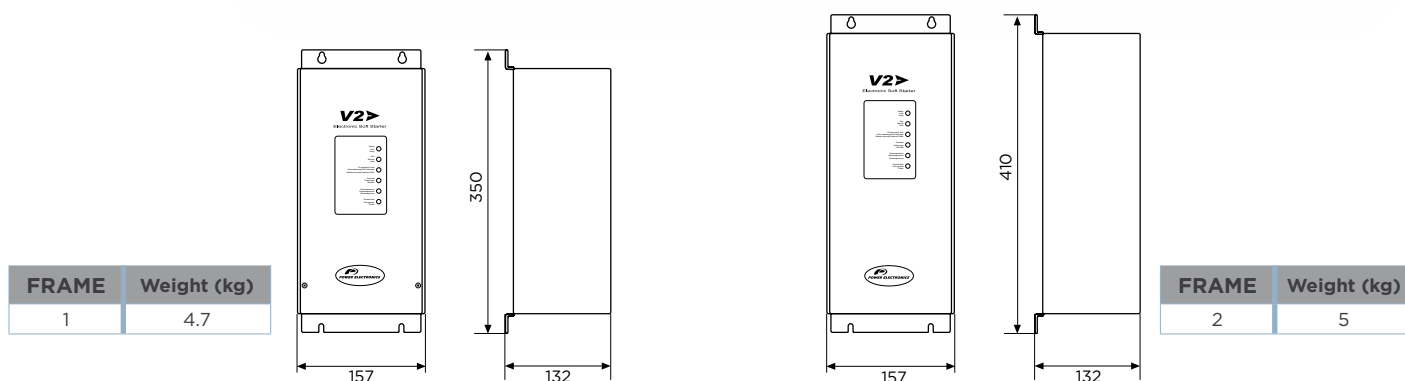

### CONTROL WIRING CONFIGURATION

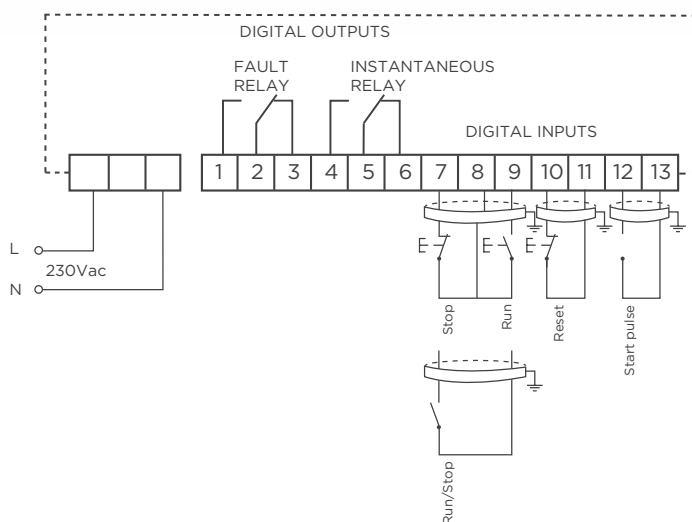

# Warranty

POWER ELECTRONICS guarantees supply against any anomaly which can be directly and exclusively attributed to design, fabrication, manufacture or material defect, thus in case those faults or defects are identified before the end of warranty, POWER ELECTRONICS undertakes to repair them in a maximum time span of 24/48h. POWER ELECTRONICS provides its clients with a 24h/365 days a year technical service. Lacking a specific agreement in particular terms, the period of the warranty is of THREE years. In application of that warranty, POWER ELECTRONICS commits to repair or replace the faulty parts. The client must communicate to POWER ELECTRONICS immediately any obvious defect, describing its nature in detail and allowing POWER ELECTRONICS to control and correct this fault. The possible expenses caused by transport, customs, expenses, etc and those related to dismounting and assembling the corrected or substituted part, will be covered by POWER ELECTRONICS, except in those cases in which the client wishes to carry out those tasks with the previous approval by POWER ELECTRONICS, which no cost for the manufacturer.



The warranty will only be valid when the transport, storage, assembly, installation, commissioning, functioning and maintenance in the delivery have all been carried out correctly by authorized personnel and in accordance with the enclosed instructions manual. The warranty exclusively includes the repair of defects and/or exchange of faulty parts on our own products. The warranty will be void in normal cases of wear and tear, being ordinary caused by functioning or external causes, or extraordinary caused by an overcharge of work load, wrong use or external causes as can be excessive humidity, dust, corroding products, electromagnetic fields, static energy, fluctuations in the quality of the electrical supply, etc. And, does not cover defects caused by accidents, by transport, inadequate storage or conservation, and in general faults which are not attributable or are out of POWER ELECTRONICS' control.

The client does not have authorization to personally repair, or do so through a third party, nor can he send the equipment to be corrected or replaced, without the specific authorization by POWER ELECTRONICS. The warranty will be void if the client or any third parties make any intervention, modification, or repair without the previous written consent by POWER ELECTRONICS, or if they do not fulfill the immediate requirements to avoid an aggravation of the damage. The warranty will not cover in any case the damage, whether direct or not, to people or objects, and in no case will the faulty equipment include compensation or payment for lack of productivity by the client or by the final user, and this is the only warranty given to the client, substituting any previous mentioned conditions or warranty, both implicit and legal, which have not been expressly accepted by POWER ELECTRONICS. The warranty always frees POWER ELECTRONICS from having to answer to faults which occur after the mentioned period. The repair or replacement of a faulty equipment at arrival will not modify the initial date of the warranty period for the global equipment. The substituted equipment will be property of POWER ELECTRONICS.

# Contact



24H/7D TECHNICAL ASSISTANCE		HEADQUARTERS - VALENCIA - SPAIN
		C/ Leonardo da Vinci, 24 - 26 - Parque Tecnológico - 46980 - PATERNA - VALENCIA - SPAIN Tel. 902 40 20 70 - Tel. (+34) 96 136 65 57 - Fax (+34) 96 131 82 01
		INTERNATIONAL SUBSIDIARIES
AUSTRALIA	<ul style="list-style-type: none"> <li>• Power Electronics Australia Pty Ltd - U6, 30-34 Octal St, Yatala, • BRISBANE • QUEENSLAND 4207</li> <li>• P.O. Box 6022, Yatala DC, Yatala Qld 4207 • AUSTRALIA • Tel. (+61) 7 3386 1993 • Fax (+61) 7 3386 1993</li> <li>sales@power-electronics.com.au</li> </ul>	
BRAZIL	<ul style="list-style-type: none"> <li>• Power Electronics Brazil Ltda - Rua Odeon, 102 - Centro • CEP 09720-290</li> <li>SÃO BERNARDO DO CAMPO • SP • BRASIL • Tel. (+55) 11 5891 9612 • Tel. (+55) 11 5891 9762</li> <li>comercialbrasil@power-electronics.com</li> </ul>	
CHILE	<ul style="list-style-type: none"> <li>• Power Electronics Chile Ltda • Los Productores # 4439 • Huechuraba • SANTIAGO • CHILE</li> <li>Tel. (+56) (2) 244 0308 • 0327 • 0335 - Fax (+56) (2) 244 0395</li> <li>• Oficina Petronila # 246, Casa 19 - ANTOFAGASTA • CHILE • Tel. (+56) (55) 793 965</li> <li>ventas@pech.cl</li> </ul>	
CHINA	<ul style="list-style-type: none"> <li>• Power Electronics Beijing - Room 606, Yiheng Building • No 28 East Road, Beisanhuan • 100013, Chaoyang District, BEIJING - R.P. CHINA • Tel. (+86 10) 6437 9197 • Fax (+86 10) 6437 9181</li> <li>• Power Electronics Asia Ltd - 20/F Winbase Centre - 208 Queen's Road Central • HONG KONG • R.P. CHINA</li> <li>sales@power-electronics.com.cn</li> </ul>	
GERMANY	<ul style="list-style-type: none"> <li>• Power Electronics Solar GmbH - Dieselstrasse, 77 • D-90441 • NÜRNBERG • GERMANY</li> <li>Tel. (+49) 911 99 43 99 0 • Fax (+49) 911 99 43 99 8</li> <li>info@ped-deutschland.de</li> </ul>	
INDIA	<ul style="list-style-type: none"> <li>• Power Electronics India - N.5, Cunningham Crescent, 1<sup>st</sup> floor.</li> <li>Bangalore 560052 - INDIA Tel./Fax +91 80 6569 0489</li> <li>salesindia@power-electronics.com</li> </ul>	
ITALY	<ul style="list-style-type: none"> <li>• Power Electronics Italia Srl - Piazzale Cadorna, 6</li> <li>20123 • MILANO • ITALIA • Tel. (+39) 342 50 73 691</li> <li>infoitalia@power-electronics.com</li> </ul>	
JAPAN	<ul style="list-style-type: none"> <li>• Power Electronics Japan KK - Nishi-Shinbashi 2-17-2 - HF Toranomom Bldg. 5F 105-0003 • Minato-Ku • TOKYO</li> <li>Tel. (+81) 03 6355 8911 - Fax (+81) 03 3436 5465</li> <li>salesjapan@power-electronics.com</li> </ul>	
KOREA	<ul style="list-style-type: none"> <li>• Power Electronics Asia HQ Co - Room #305, SK Hub Primo Building - 953-1</li> <li>Dokok-dong, Gangnam-gu - 135-270 • SEOUL • KOREA</li> <li>Tel. (+82) 2 3462 4656 • Fax (+82) 2 3462 4657</li> <li>sales@power-electronics.kr</li> </ul>	
MEXICO	<ul style="list-style-type: none"> <li>• P.E. Internacional Mexico S de RL - Avda. Tejocotes lote 76 A S/N • San Martin Obispo</li> <li>Tepetlixpa • CP 54763 • CUAUTITLAN IZCALLI • MEXICO</li> <li>Tel. (+52) 55 5390 8818 • Tel. (+52) 55 5390 8363</li> <li>ventasmexico@power-electronics.com</li> </ul>	
MOROCCO	<ul style="list-style-type: none"> <li>• Power Electronics - Ekoakua • Geea sarl , N°184 Bloc Hay EL.Massira Ait Melloul •CP 80150 • Agadir • MAROC</li> <li>Tel. + 212 5 28 24 04 57 • Mob. (+34) 628 11 76 72</li> <li>ventesmaroc@power-electronics.com</li> </ul>	
NEW ZEALAND	<ul style="list-style-type: none"> <li>• Power Electronics New Zealand Ltd - 12A Opawa Road, Waltham - CHRISTCHURCH 8023</li> <li>• P.O. Box 1269 CHRISTCHURCH 8140 • NEW ZEALAND</li> <li>Tel. (+64 3) 379 98 26 - Fax.(+64 3) 379 98 27</li> <li>sales@power-electronics.co.nz</li> </ul>	
SOUTH AFRICA	<ul style="list-style-type: none"> <li>• Power Electronics South Africa Pty Ltd • Central Office Park Unit 5 • 257 Jean Avenue</li> <li>Centurion 0157 • SOUTH AFRICA</li> <li>Tel. (+34) 96 136 65 57 • Fax (+34) 96 131 82 01</li> <li>salesza@power-electronics.com</li> </ul>	
TURKEY	<ul style="list-style-type: none"> <li>• Perpa Ticaret Merkezi A Blok Kat:2 No:9/0034 - 34384 Okmeydanı Şişli • İstanbul • TURKEY</li> <li>Tel: 0 212 221 48 48 (124) • Fax 0 212 221 17 00</li> <li>turkiyesatis@power-electronics.com</li> </ul>	
UNITED KINGDOM	<ul style="list-style-type: none"> <li>• Power Electronics UK Pty Ltd: Wells House, 80 Upper Street, Islington</li> <li>London, N1 0NU • 147080 Islington 5 • Tel. (+44) 149 437 00 29</li> <li>uksales@power-electronics.com</li> </ul>	
UNITED STATES	<ul style="list-style-type: none"> <li>• Power Electronics USA Inc. • 505 Montgomery Street, 11th Floor San Francisco • CA 94111 • USA</li> <li>Tel. (415) 874-3668 • Fax (415) 874-3001 • Mob.(415) 376-1471</li> <li>sales@power-electronics.us</li> </ul>	



**V5**   
**ELECTRONIC SOFTSTARTER**

**V2**   
**ELECTRONIC SOFTSTARTER**



