

# DX2011




## Multifunction display for monitoring analogue standard signals

DISPLAY/AX360

Article no longer available - archive entry

Alternative articles: DX2041

When selecting an alternative article and accessories please note that technical data may differ!

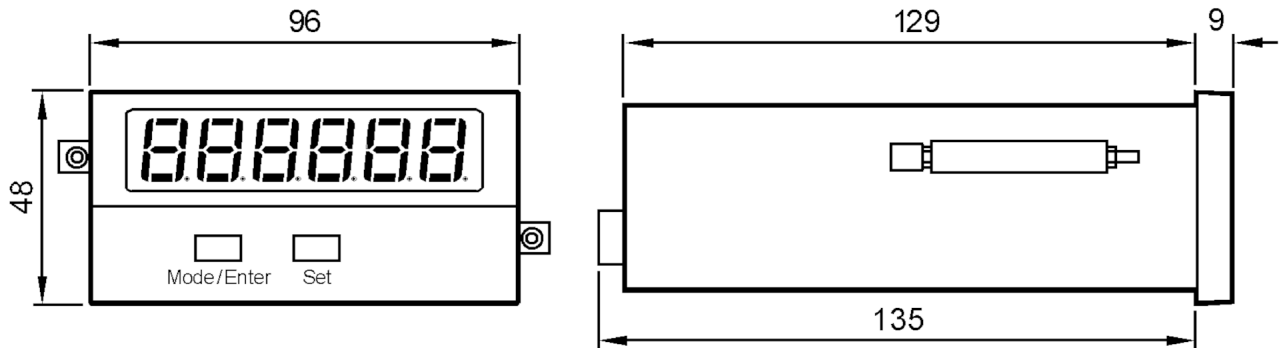

### Application

Application

display of analogue standard signals; e.g. pressure sensors, temperature sensors or flow sensors

### Electrical data

Frequency AC	[Hz]	50...60
Operating voltage tolerance	[%]	33...58
Operating voltage	[V]	230 / 115 AC / 24 DC
Current consumption	[mA]	110 (18 V); 90 (24 V); 80 (30 V)
Auxiliary energy for sensors DC	[V]	24; ( $\pm 15\%$ , 150 mA; Short-circuit proof)

### Inputs / outputs

Number of inputs and outputs

Number of analogue inputs: 2

### Inputs

Number of analogue inputs

2

### Outputs

Analogue current output	[mA]	4...20
Analogue voltage output	[V]	0...10

### Operating conditions

Ambient temperature	[°C]	0...45
---------------------	------	--------

# DX2011



## Multifunction display for monitoring analogue standard signals

DISPLAY/AX360

Storage temperature [°C]	-25...70
Protection	IP 65; (on the front)
Protection rating terminals	IP 20

### Tests / approvals

EMC	EN 50081-1	
	EN 61000-6-2	

### Mechanical data

Weight [g]	552
Materials	Noryl UL94-V-0

### Displays / operating elements

Display	7-segment LED display, orange 6-digit 15 mm
---------	---

### Electrical connection

screw terminals, DC: 10 x ...1.5 mm<sup>2</sup>

screw terminals, AC: 4 x ...2.5 mm<sup>2</sup>

### Connection

